

Deskpro/i

System Boards	Serial No.	Assembly	Spare Part
386DX/25 Processor	HCP ¹	002566	141342-001 DISCONTINUED
386DX/25 Processor	HEA ²	002623	141098-001 DISCONTINUED
386DX/33 Processor	HCQ ¹	002569	141341-001 DISCONTINUED
386DX/33 Processor	HEB ²	002626	141099-001 DISCONTINUED
486SX/25 Processor	HCR ¹	002572	141339-001 DISCONTINUED
486SX/25 Processor	HEC ²	002629	147200-001 DISCONTINUED
486SX/25 Processor	HFW ³	003047	194445-001 DISCONTINUED
486DX/33 Processor	HCS ¹	002575	141340-001 DISCONTINUED
486DX/33 Processor	HED ²	002632	147201-001 DISCONTINUED
486DX/33 Processor	HFY ³	003050	194446-001 DISCONTINUED
486DX/66 Processor	HCT ¹	002578	141338-001 DISCONTINUED
486DX2/66 Processor	HEE ²	002635	147202-001 DISCONTINUED
486DX/66 Processor	HFZ ³	003053	194447-001 DISCONTINUED

¹ Rev 1. Original DP/i system board. Uses 64K cache p/n 141345-001 - DISCONTINUED (002581).

² Rev 2. Second DP/i system board. Uses 64K cache p/n 141477-001 - DISCONTINUED (002754).

³ Rev 32. Third DP/i system board. Uses 64K cache p/n 141477-001 - DISCONTINUED (002754).

SW500 Processor Configuration Settings (All Deskpro/i Processor Boards)

Processor	S1	S2	S3	S4
50-MHz ODP; 63 Mhz Pentium OverDrive (P-ODP) *	OFF	ON	ON	ON
66-MHz ODP; 83 Mhz Pentium OverDrive (P-ODP) *	OFF	ON	ON	OFF
386/25-MHz	OFF	ON	OFF	ON
386/33-MHz	OFF	ON	OFF	OFF
486DX/25-MHz, DX2 ODPR; DX4 ODPR	ON	OFF	ON	ON
486DX/33-MHz, DX2 ODPR; DX4 ODPR	ON	OFF	ON	OFF
486DX2/50	ON	OFF	ON	ON
486DX2/66	ON	OFF	ON	OFF
486SX/25	OFF	OFF	OFF	ON
487SX/25	OFF	ON	ON	ON

* Supported on assemblies 2629, 2632, 2635, 3047, 3050, 3053. Also identified by the following configuration codes: HEC, HFW (486SX/25); HED, HFW (486DX/33); HEE, HF2 (486DX2/66).

Deskpro/i

SW501 Processor Configuration Settings (Assembly 002566, 002569, 002572, 002575, 002578)

Processor	S1	S2	S3	S4	S5	S6
386	OFF	OFF	OFF	ON	ON	ON
486SX	ON	ON	ON	OFF	OFF	OFF
487SX	ON	ON	ON	OFF	OFF	OFF
486DX	ON	ON	ON	OFF	OFF	OFF
486DX2	ON	ON	ON	OFF	OFF	OFF
50-MHz Overdrive	ON	ON	ON	OFF	OFF	OFF
66-MHz Overdrive	ON	ON	ON	OFF	OFF	OFF

SW502 System Maintenance Configuration Settings (Assembly 002566, 002569, 002572, 002575, 002578)

Switch	Position	Status	Function
S1	ON	Disabled	Turns off integrated video controller.
	OFF*	Enabled	Enables the video controller.
S2	ON	Enabled	Locks the setup information. Cannot change configuration.
	OFF*	Disabled	Allows configuration changes.
S3	ON	Enabled	Sets the diskette drive for Read only.
	OFF*	Disabled	Allows read/write capability.
S4	OFF*	Disabled	Reserved. Switch remains in OFF position.
S5	ON	Enabled	Clears power-on password and administrator password.
	OFF*	Disabled	Allows power-on password and administrator password security feature.
S6	OFF*	Disabled	Reserved. Switch remains in OFF position.

* Default.

SW502 System Maintenance Configuration Settings (Assembly 002623, 002626, 002629, 002632, 002635)

Switch	Position	Status	Function
S1	ON	Disabled	Turns off integrated video controller.
	OFF*	Enabled	Enables the video controller.
S2	ON	Enabled	Locks the setup information. Cannot change configuration.
	OFF*	Disabled	Allows configuration changes.
S3	ON	Enabled	Sets the diskette drive for Read only.
	OFF*	Disabled	Allows read/write capability.
S4	OFF*	Disabled	Reserved. Switch remains in OFF position.
S5	ON	Enabled	Clears power-on password and administrator password.
	OFF*	Disabled	Allows power-on password and administrator password security feature.
S6	OFF*	Disabled	Prevents Flash ROM updates.
	ON	Enabled	Permits Flash ROM updates.

* Default.

Deskpro/i

Audio Configuration Jumpers (Assembly 002566, 002569, 002572, 002575, 002578)

Function	Jumper	Pins to Connect	Note
Select IRQ07	E3	1 - 2	Selects interrupt request.
Select IRQ10	E6	1 - 2	Only one request is selected at a time.
Select IRQ11	E1	1 - 2	
Select DMACH0 for capture	E4	1 - 2	Selects capture and playback channels. Only one capture and one playback channel can be selected.
Select DMACH0 for playback	E4	2 - 3	
Select DMACH1 for capture	E7	1 - 2	
Select DMACH1 for playback	E7	2 - 3	
Select DMACH3 for capture	E9	1 - 2	
Select DMACH3 for playback	E9	2 - 3	
Select I/O address range			Selects the I/O address range for accessing the audio circuitry.
608h-60bh	E8	1 - 2	
534h-537h	E8	2 - 3	
Audio	E2	1 - 2	Audio enabled.
	E2	2 - 3	Remove all other jumpers if audio is disabled.

Memory	Assembly	Spare Part
1 MB Memory Module	118666	118740-001 DISCONTINUED
2 MB Memory Module	118667	113923-001 DISCONTINUED
4 MB Memory Module	118665 137854	118741-001
8 MB Memory Module	129041	128954-001
64 KB Cache Module	002581	141345-001 DISCONTINUED
64 KB Cache Module	002754	141477-001 DISCONTINUED
512 VRAM Module	002593	141335-001 DISCONTINUED

Controller Boards	Assembly	Spare Part
6260 SCSI-2 Controller Board *	004004	146993-001
Ethernet 16TP Controller Board	003086	147220-001
QVision 1280/I Controller Board *	002951	139182-001 DISCONTINUED
Tape Adapter Board *	000774	113259-001

* See Multiproduct Boards Appendix, for settings.

Miscellaneous Internal	Assembly	Spare Part
14.4 bps Fax/Modem **	193052-002	193080-001 DISCONTINUED
Backplane Board	002584	141348-001 DISCONTINUED
Serial/Parallel Interface Board *	000990	106886-001 Replaced w/ 106886-002

* See Multiproduct Boards Appendix, for settings.

** See Modem Configuration Information Appendix for settings.

Deskpro/i

Hard Drives

Size	Type	Inter-leave	Inte-grated	Min ROM	Spare Part	Controller Assembly
84 MB	27	1:1	Y	051592	141814-001	N/A
120 MB	50	1:1	Y	051592	143316-001	N/A
210 MB	51	1:1	Y	051592	124013-001 ¹ 161956-001 ^{2,3} 162096-001 ^{2,4}	N/A
240 MB	1	1:1	Y	082192	143332-001 DISCONTINUED	N/A
330 MB SCSI	N/A	1:1	N	N/A	142037-001	004004
340 MB	63	1:1	Y	051592	128141-001	N/A
340 MB	63	1:1	Y	020593	160044-001 DISCONTINUED ¹ 111883-001 ²	N/A
510 MB	61	1:1	Y	051592	128142-001	N/A
550 MB SCSI	N/A	1:1	N	N/A	142038-001	004004
1.05 GB SCSI	N/A	1:1	N	N/A	192799-001	004004

¹ Except Europe.

² Europe only.

³ IDA, IDA2.

⁴ IDE.

CD-ROM Drives

Spare Part

DualSpeed Internal	133881-001
DualSpeed External	133882-001
Internal Tray Load	142223-001
External Tray Load	199430-001

Tape Drives

Spare Part

Tape Cartridge

Spare Part

80/120 MB * (1/2 height)	122087-001	80 MB (DC2080) 120 MB (DC2120)	116966-001 116967-001
80/120 MB * (1/3 height)	131337-001	80 MB (DC2080) 120 MB (DC2120)	116966-001 116967-001
120/250 MB * (1/2 height)	197490-001 DISCONTINUED	120 MB (DC2120)	116967-001
150/250 MB**	115220-001	150 MB (DC600 XTD) 250 MB (DC6250)	113234-001 115298-001
320/525 MB	116804-001	320 MB (DC6320) 525 MB (DC6525)	119505-001 119504-001
525 MB ACA	142073-001	525 MB (DAT)	119504-001
5.0 GB DAT	142074-001	1.3 GB 2.0 GB DAT Cleaning Cartridge	131167-001 131148-001 131194-001

* With compression.

** Uses Tape Adapter 113259-001.

Diskette Drives

Spare Part

1.2 MB	141367-001
1.44 MB *	141350-001 DISCONTINUED

* Requires MS-DOS Version 3.31 Revision A (or later) if installed as drive B, and MS-DOS Version 3.31 Revision B (or later) if installed as drive A.

Deskpro/i

Cables	Used With	Spare Part
Diskette Signal Cable	1.44 Diskette	141186-001 DISCONTINUED
Hard Drive Signal Cable	All Drives	141187-001 DISCONTINUED
LED Cable	System lights	141346-001
SCSI Signal – 3 Connector Cable	SCSI Adapter	146997-001
VESA Connector Cable		139166-001 DISCONTINUED
VGA Pass-Through Cable	Video	141317-001 DISCONTINUED

Processor/Coprocessor Locations

Processor Board	Processor Location	Coprocessor Location
386DX/25 (002566)	U9	U10
386DX/25 (002623)	U21	U13
386DX/33 (002569)	U9	U10
386DX/33 (002626)	U21	U13
486SX/25 (002572)	U36	N/A
486SX/25 (002629)	U21	N/A
486DX/33 (002575)	U36	N/A
486DX/33 (002632)	U102	N/A
486DX/66 (002578)	U36	N/A
486DX2/66 (002635)	U102	N/A

System ROM Information

System	ROM Location
386DX/25 (002566)	U103
386DX/25 (002623)	U43
386DX/33 (002569)	U103
386DX/33 (002626)	U43
486SX/25 (002572)	U103
486SX/25 (002629)	U43
486DX/33 (002575)	U103
486DX/33 (002632)	U43
486DX/66 (002578)	U103
486DX2/66 (002635)	U43

System ROM Revisions (Spare Part 141437-001 - DISCONTINUED) (Assembly 002566, 002569, 002572, 002575, 002578)

Revision	Number On ROM
051592	141069-003
082192	141069-004
090392	141069-005

System ROM Revisions (ROMPaq Spare Part 147222-001) (Assembly 002623, 002626, 002629, 002632, 002635)

Revision	Spare Part
101592	141247-003
020593	141437-001 DISCONTINUED

Deskpro/i

Battery/Power Supply**Spare Part**

Battery/Clock Module

126570-001

Power Supply

137633-001 (115 V)

DISCONTINUED


141337-001 (230 V)

DISCONTINUED


Deskpro/i

Memory Upgrade Chart

PROCESSOR BOARD (4 MEGABYTES)
Assy # 002566/002569/002578/002575/002623/
002626/002629/002632/002635

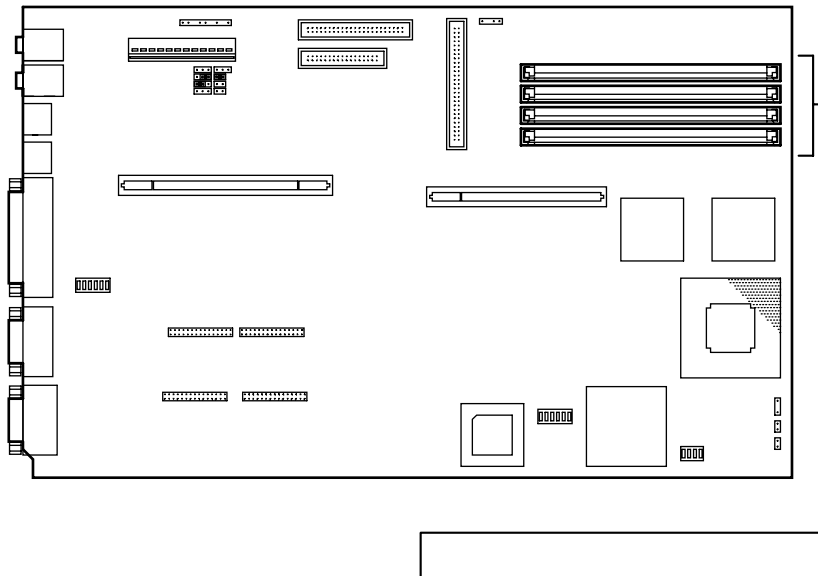

ADD ANY 4 OF THE FOLLOWING UP
TO 32-MB TOTAL SYSTEM MEMORY

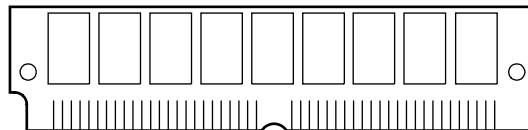

1-MB MEMORY MODULE
SPARE PN 118740-001

2-MB MEMORY MODULE
OPTION PN 118689-001

4-MB MEMORY MODULE
OPTION PN 118690-001

8-MB MEMORY MODULE
OPTION PN 128877-001