

# ATTENTION


No Installation CD is required !

## Setting up your ADSL Ethernet Modem for Internet Connection

(See the Easy Start documentation for more details)

1


Connect the Modem to your computer as follows.

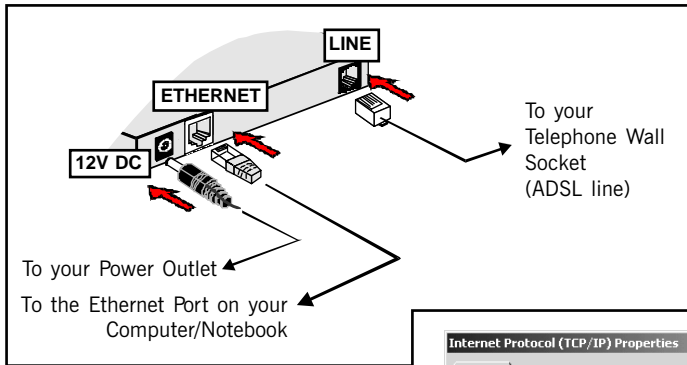

2

Power on the Modem and computer. Configure your Ethernet Network Card.

select to automatic IP Address

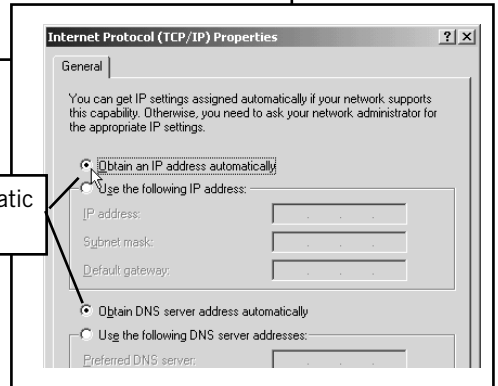

3

Configure your Internet Browser to disable the Proxy Server and to clear cache.

4

Key in **10.0.0.2**, **startmodem** or **login** on the address bar of your Internet Browser and hit <Enter>.

Enter your Username and Password as given by your ADSL Service Provider and click **Submit**.



### Quick Start

Welcome,

Username:

Password:

You will see the **Connection Status** page showing connected. This means that you are already connected to the Internet!

# Connecting the ADSL Ethernet Modem to a Broadband Router

To connect to a Broadband Router, you need to configure ADSL Ethernet Modem to broadband sharing mode. Carry out the following configuration **BEFORE** connecting to your Broadband Router!

1

From the Internet Browser, key in **connectrouter** on the Address bar and hit **<Enter>**.



If you are having problem with this step, replace **connectrouter** with **10.0.0.2/doc/switch1.htm**

## Saving Configuration

Your settings are being saved, and the modem is being rebooted. Please wait for 1 minute and do not turn off your modem... After 1 minute, you may close this window.




You may now connect the ADSL Ethernet Modem to your Broadband Router.

**NOTE!** In broadband sharing mode, you will not be able to use the commands **startmodem**, **login** and **logout**.

2

3

To revert to single-user mode, activate the reset button at the back of the Modem.

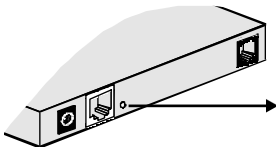

Ensure that your Modem is **powered on**. Use a paper clip or a pencil tip to depress the reset button and release. The **DSL** light will go off. When the **DSL** indicator starts blinking, it means that the reset process is completed. The default settings are now restored. ADSL line is established once the **DSL** indicator lights up.