OVERVIEW
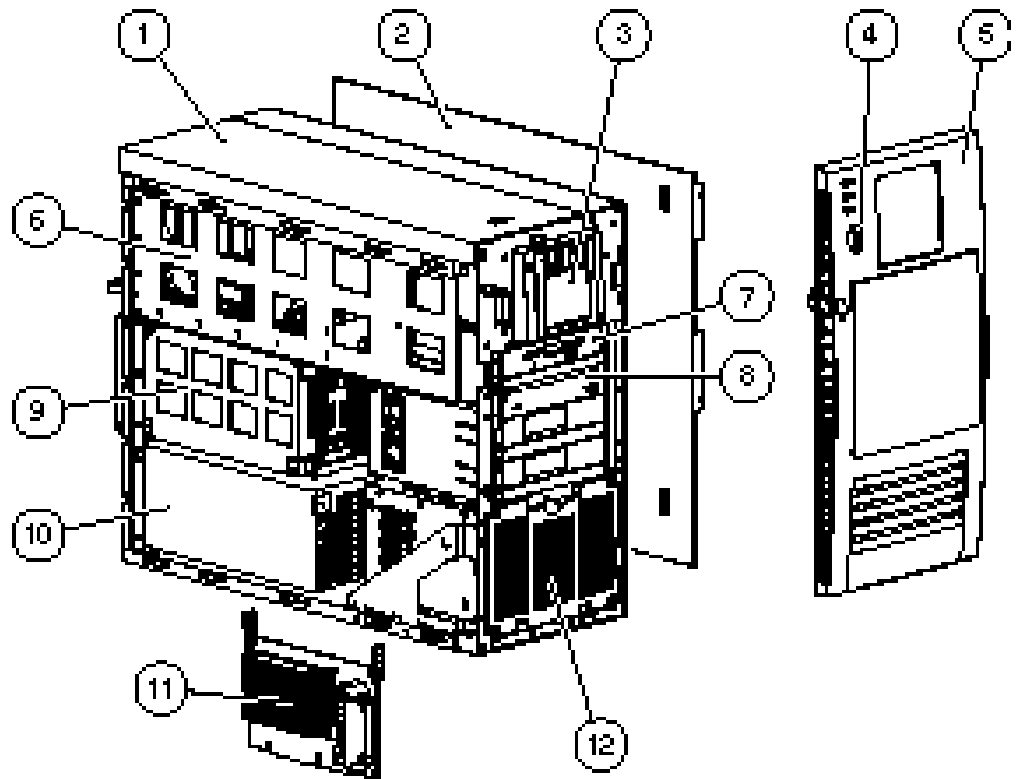
BENEFITS AT A GLANCE

- Minitower form factor for increased expandability
- Supports up to two Pentium® II 266- or 300-MHz processors
- 512 KB write-back Level 2 cacheintegrated on processor
- 32, 64, 128 MB of RAM standard, expandable up to 512 MB using EDO ECC buffered DIMMs
- Wide-Ultra SCSI-3 host controller
- Supports up to seven SCSI devices
- High performance 2.1-GB and 4.3-GB Wide-Ultra SCSI SMART hard drives
- Up to 54.6 GB of high performance internal storage
- Autosensing Netelligent 10/100 TX Embedded UTP Controller capable of operating in either 10Base-T or 100Base-TX environments
- 32-bit, PCI-based system
- Six total slots/10 bays (four user-accessible, six internal)
- Internal 16X MAX CD-ROM Drive (IDE) and PremierSound Audio
- Choice of Matrox MGA Millennium II, ELSA GLoria-L 3D or Diamond Fire GL 4000 Graphics Controllers
- Multiple monitor support (select models)
- Rack-mountable via optional conversion kit
- Full Plug and Play
- Optimized for Windows NT Workstation
- Protected by CompaqCare, including a three-year limited warranty[1]

[1] Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

1. Small Access Panel
2. Large Access Panel
3. PremierSound Speaker
4. Power Switch
5. Front Panel
6. I/O Cage
7. Diskette Drive
8. 16X CD-ROM Drive
9. Processor and Memory Cage
10. 325W Power Supply
11. Pentium II Processor Board
12. Hard Drive Cage