

56K PCI Modem

Easy Start (Read Me First)

Version 1.0

Contents

About this Easy Start	2
Package	2
Step 1: Installing Your Modem Card	3
Step 2: Connecting Your Modem	4
Step 3: Installing Your Modem Driver	5
3.1 For Windows® XP users	5
3.2 For Windows® Me users	8
3.3 For Windows® 98 users	10
3.4 For Windows® 95 users	12
3.5 For Windows® 2000 users	14
3.6 For Windows NT® 4.0 users	16

Product warranty does not apply to damage caused by lightning, power surges or wrong voltage.

About this Easy Start

This booklet contains information on setting up your 56K PCI Modem. It touches on the key installation procedures to help you setup your modem.

For users who have not install a modem card before, it is recommended that you refer to the User Manual on the Installation CD for detailed installation instructions.



For more detailed descriptions of your card and installation procedures, you may refer to the **ReadMe.txt** file and **56K PCI Modem User Manual** found on your Installation CD. The manual also includes the sections on frequently asked questions and troubleshooting guide.

Package

Please check that you have the following items in your package. If you found any missing items, please contact your dealer immediately.


- 1 56K PCI Modem Card
- 1 Installation CD
- 1 Telephone extension cable (optional)
- 1 56K PCI Modem Easy Start

Step 1: Installing Your Modem Card




Power off your computer and any connected devices before connecting your modem card!

After removing the cover of your computer, locate any available PCI-Bus slot and remove its cover plate.

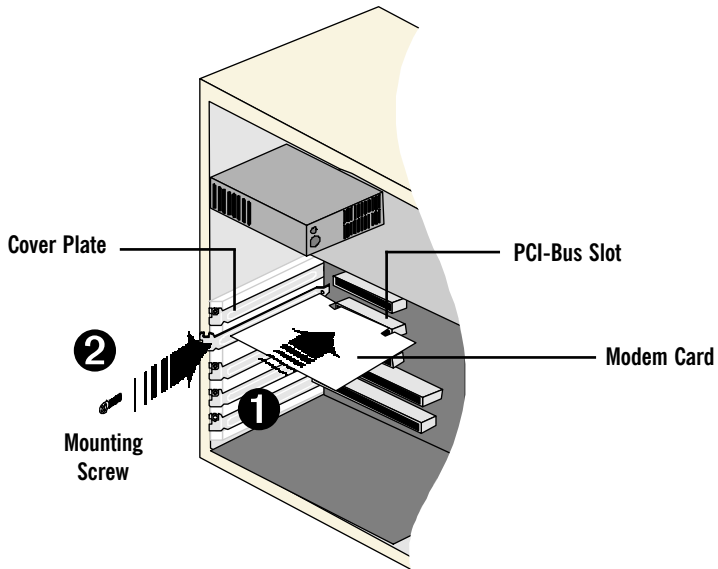

- 1 Insert your modem card firmly into the PCI-Bus slot.
- 2 Secure the modem card with the mounting screw and replace the cover of your computer.

Step 2: Connecting Your Modem

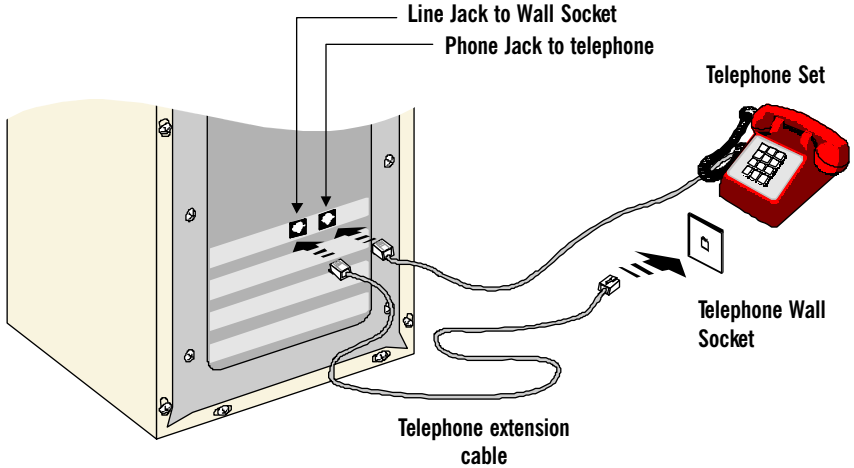

Connect your card as illustrated above. Upon completion, please proceed to the following section to install the card driver.



The connection for the **Telephone set** is **optional**. The **Phone jack** provides convenience to users who need to use the phone when accessing the computer.

Step 3: Installing Your Modem Driver




1. The screen shots in this section assume that your **CD-ROM Drive** is 'D'. Please change the letter according to your own CD-ROM drive.
2. Depending on your system configurations, you may prompt for your **Windows CD-ROM** during the driver installation. Have it ready by your side.
3. **The screen shots, screens information and steps illustrated in this booklet serve only as a guide. The exact information you see on your system may vary, depending on your system configurations. For any dissimilarities, follow closely to the instructions prompted on your computer.**

3.1 For Windows® XP users


1. Power on your computer to start Windows. It will detect your newly-installed modem card and install a generic driver for your modem.
2. From your Windows taskbar, click **Start > Settings > Control Panel**. Double-click on the **Phone and Modems Options** icon.
3. Click the **Modems** tab. You will see the generic modem listed. Click on the Modem and select **Properties**.

4. Select the **Driver** tab and click **Update Driver**.

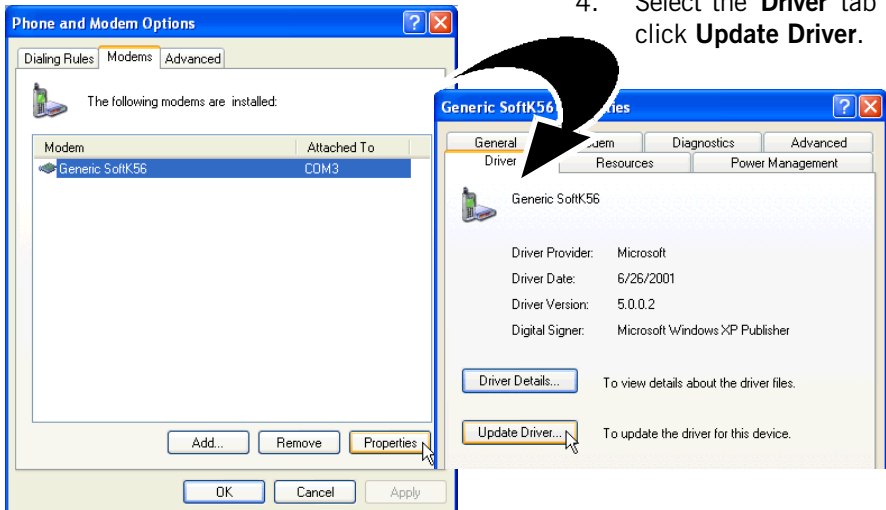


5. The **Hardware Update Wizard** will appear. Place the Installation CD into your CD-ROM drive.


Select **Install from a list or specific location (Advanced)** option and click **Next**.

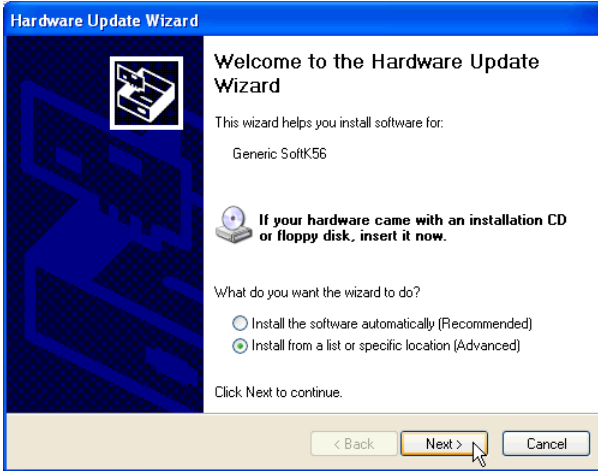


6. Click **Don't search. I will choose the driver to install** option and click **Next**.
7. Click the **Have Disk...** button.
8. Click **Browse** and navigate to the '**WinXP**' folder on your Installation CD and click **OK**.

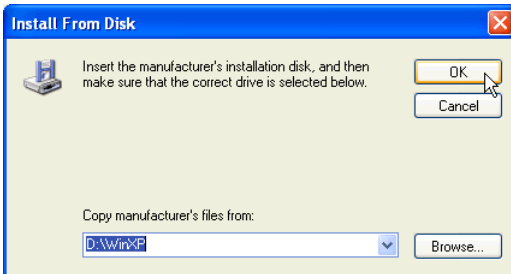

- Click on **56K PCI Modem** and click **Next**.

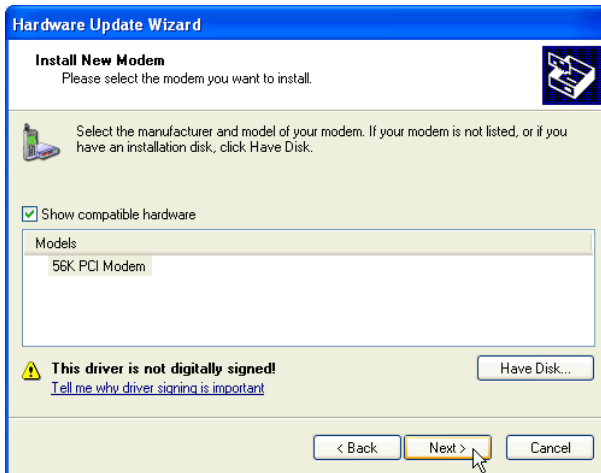

- At the Hardware Installation prompt, click **Continue Anyway**.
- Click **Finish** to complete the installation.

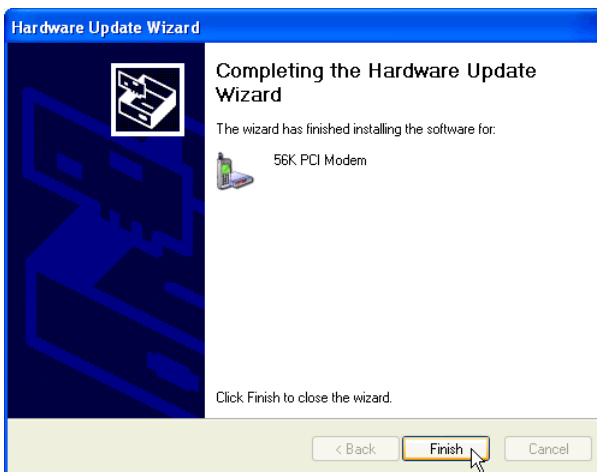

Close the Modem Properties dialog box. This completes the installation of the modem driver in Windows® XP.


3.2 For Windows® Me users

1. Power on your computer to start Windows. It will detect your newly-installed 56K PCI Modem and prompt for its driver.




Select **Specify the location of the driver (Advanced)** option and then click **Next**.

2. Place the **Installation CD** into your CD-ROM drive. Click **Specify a location**. Click **Browse** and navigate to **Winme** folder on the Installation CD. Click **Next**.

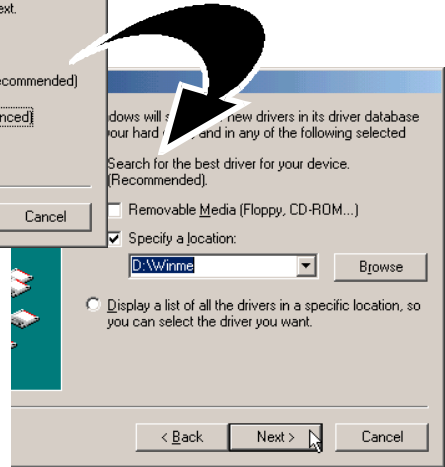

3. Click **Next** again to proceed installation with the driver found. (Do not worry if the driver name (.inf) on your computer differs from what is illustrated here. They are all referring to the same installation files.)

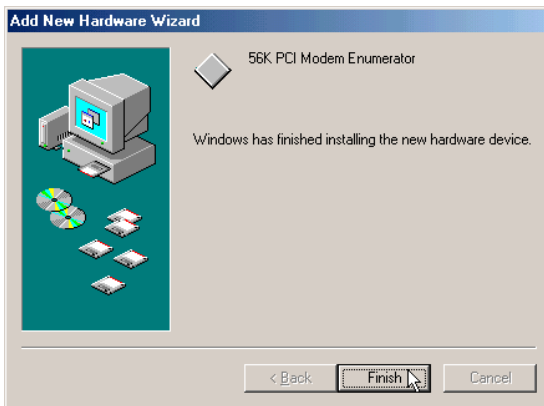

4. To complete the driver installation, click **Finish**.


This completes the installation of the modem driver in Windows® Me.

3.3 For Windows® 98 users

1. Power on your computer to start Windows. It will detect your newly-installed 56K PCI Modem and prompt for its driver.



2. Place the Installation CD into your CD-ROM drive. Select **Search for the best driver for your device (Recommended)** and click **Next**.

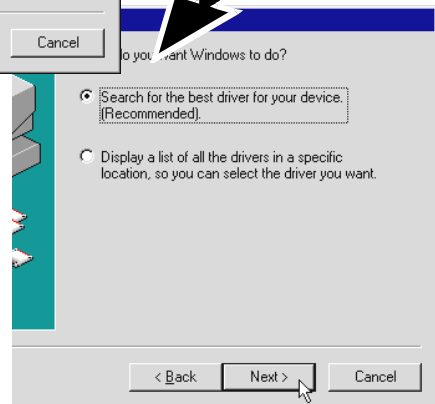

3. Select **Specify a location**. Click **Browse** and navigate to **Win9x** folder on your Installation CD. Click **Next**.

- Click **Next** again to proceed installation with the specified driver. Allow some time for your system to install the driver.



(Do not worry if the driver name (.inf) on your computer differs from what is illustrated here. All are referring to the same installation files.)


- Click **Finish** to complete the installation.




This completes the driver installation for your modem in Windows® 98.

3.4 For Windows® 95 users

1. Power on your computer to start Windows. It will detect your newly-installed 56K PCI Modem and prompt for its driver.

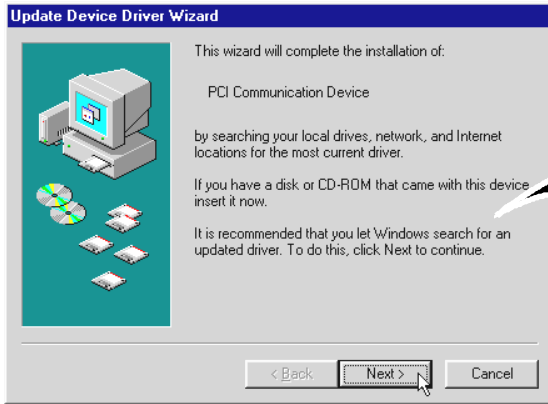


Place the Installation CD into your CD-ROM drive and click **Next**.

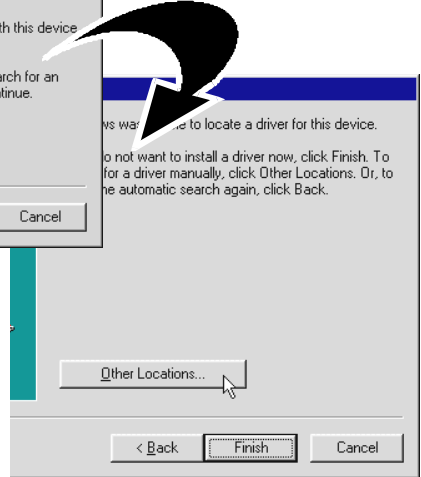

2. Click **Other Locations...** to specify the driver path.


3. Click **Browse** and navigate to **Win9x** folder on your Installation CD drive and click **OK**.

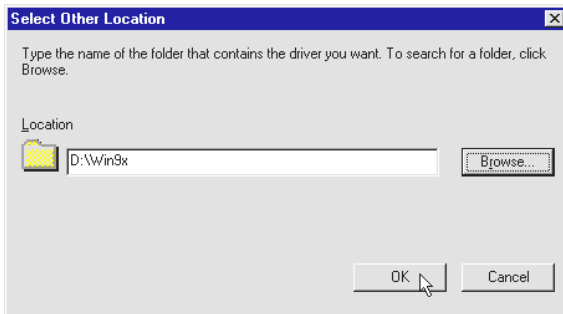

- Click **Finish** to proceed installation with the driver found.



- At the **Insert Disk** prompt, click **OK**.

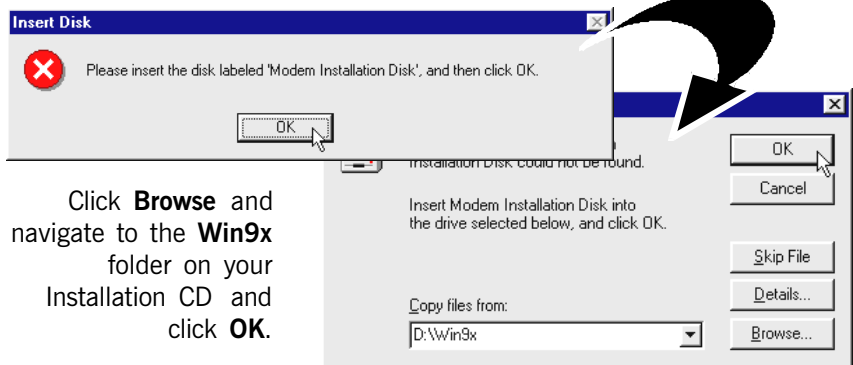


Click **Browse** and navigate to the **Win9x** folder on your Installation CD and click **OK**.

This completes the driver installation for your modem in Windows® 95.

3.5 For Windows® 2000 users



1. Power on your computer to start Windows. It will detect your newly-installed 56K PCI Modem and prompt for its driver.

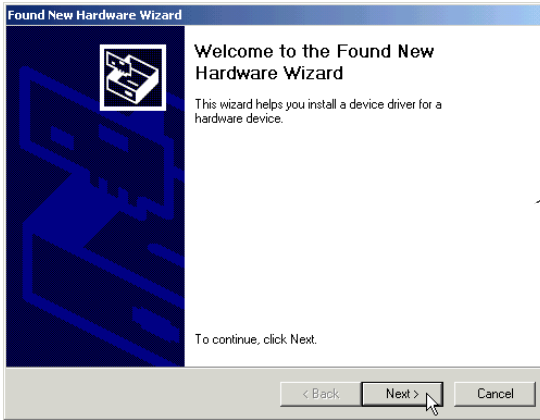

Place the Installation CD into your CD-ROM drive and click **Next**.




2. Select **Search for a suitable driver for my device (recommended)** and click **Next**.

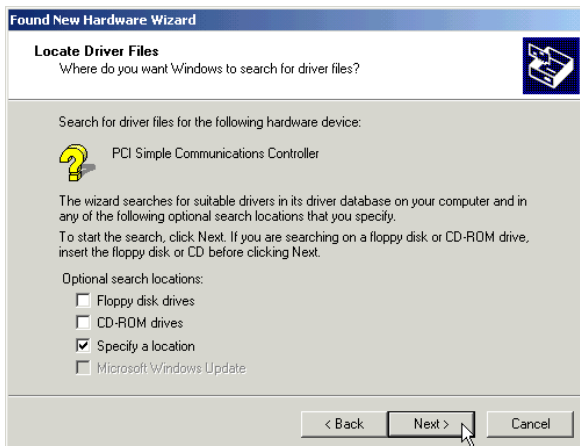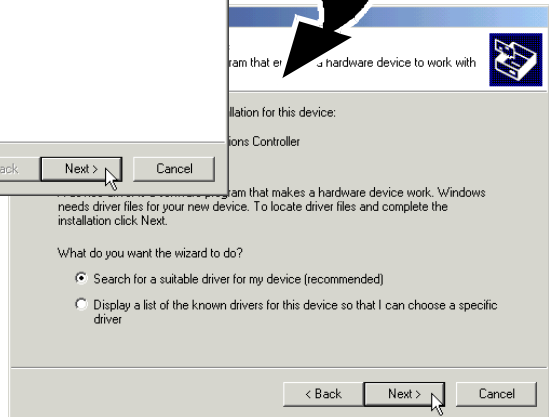

3. Select **Specify a location** and click **Next**.

- Click **Browse** and navigate the **WIN2000** folder on your Installation CD and click **OK**.

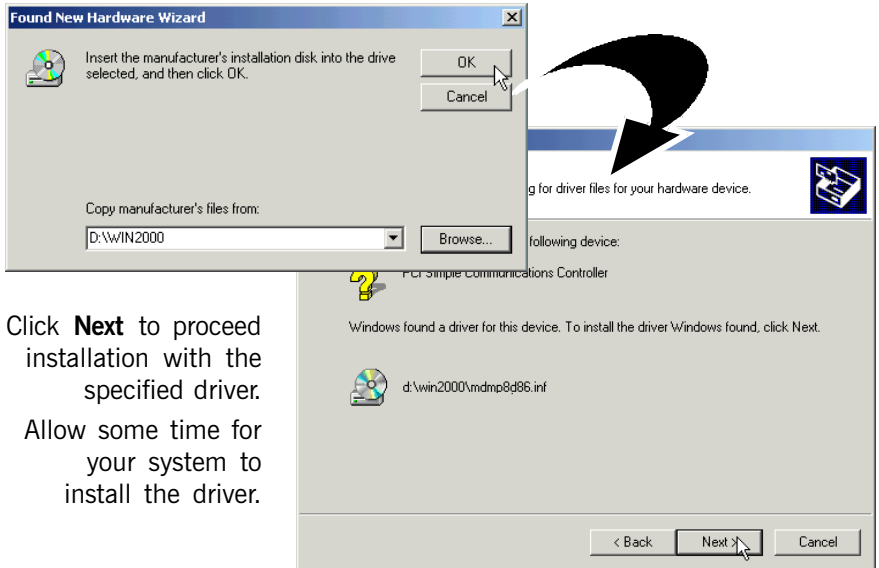

- Click **Next** to proceed installation with the specified driver.
Allow some time for your system to install the driver.

(Do not worry if the driver name (.inf) on your computer differs from what is illustrated here. All are referring to the same installation files.)

- You may be prompted with **New Signature Not Found** dialog box. This occurs when Windows detected a newer version of your driver.
Click **Yes** to proceed.



- Click **Finish** to complete the installation.

This completes the driver installation for your modem in Windows® 2000.

3.6 For Windows NT® 4.0 users

1. Power on your computer to start Windows. Place the Installation CD into your CD-ROM drive.
2. From your Windows taskbar, click **Start** > **Run**.
3. Click **Browse** and navigate to the **WinNT** folder on your Installation CD. Locate the file **Setup.exe** and click **OK**.
4. At the window prompt, click **Next** to begin the installation process.
5. Click **Next** again to install the driver.
6. Click **Finish** to complete the installation process.

This completes the driver installation for your modem in Windows NT® 4.0.

- All other company or product names are trademarks or registered trademarks or service marks of their respective owners.

© Copyright, September 2001.
P/N: 040-511459-101 (Ref: 3885U)