

November 2000
13NT-1000A-WWEN
Prepared by:
Storage Products Division
Compaq Computer Corporation

Contents

Introduction	3
Rack Warnings	4
Compaq Third-Party Rack Option Kit	5
Server Specifications for Deployment	6
Weight	6
Dimensions	9
Power Consumption	10
Thermal Dissipation	10
Third-Party Rack Doors and Panels	12
Installation Procedures for Third-Party Racks	12
Installing the Compaq Third- Party Rack Option Kit Rack Rails	12
Adjusting Depth	12
Preparing the Server	13
Installing ProLiant servers in the Rack	13
Console Management for Ultra-Dense 1U Servers	14
Remote Insight Lights-Out Edition	14
Console Switches, Monitors and Keyboards	15
Cabling	15
Cable Management Tray	17
Appendix A	18
Unit Identification	18
Appendix B	19
Compaq Rack Builder Pro	19
Appendix C	20
Monitors, Keyboards, and Console Switches	20
Part Numbers	20
Appendix D	21
Contact Us	21

Deploying Compaq ProLiant DL320 and DL360 Servers into Third-Party Racks

Abstract: Compaq *ProLiant*[™] DL320 and *ProLiant* DL360 servers were developed with high volume deployment in mind. As a result, Compaq addresses environmental, thermal, mechanical, power, installation, and service considerations for the server and rack—specific options.

While Compaq 9000 and 7000 series racks are ideal for these ultra-dense servers, Compaq recognizes that customers may want to plan and implement deployments using third-party racks. This document describes deployments involving the ProLiant DL320 and ProLiant DL360 servers and the Compaq Third-Party Rack Option Kit.

Compaq provides hardware, specifications, and guidelines for deployment schemes using third-party racks as a service to its customers.

Notice

13NT-1000A-WWEN © 2000 Compaq Computer Corporation.

COMPAQ, the Compaq logo, ProLiant, Rack Builder Pro, and Compaq Rack 9000 Series are registered with the U.S. Patent and Trademark Office. Microsoft and Windows NT are trademarks of Microsoft Corporation. All other product names mentioned herein may be trademarks of their respective companies.

Compaq shall not be liable for technical or editorial errors or omissions contained herein. The information in this document is provided “as is” without warranty of any kind and is subject to change without notice. The warranties for Compaq products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.

Introduction

Compaq designed the ProLiant DL320 and ProLiant DL360 ultra-dense servers with maximally configured deployments in mind. The servers require only 1U (1.75 inches) of rack height.

This document discusses installation and service issues that arise when working with ultra-dense server deployment, including:

- Mounting options for varying rack environments
- Weight
- Power distribution
- Thermal and environmental considerations
- Console management choices
- Cable management
- Unit identification

This paper provides guidelines for deploying multiple ProLiant DL320 and ProLiant DL360 servers in third-party racks using the Compaq Third-Party Rack Option Kit (P/N: 174574-B21), and provides information on Compaq rack products and related options. For information regarding Compaq deployment of ultra-dense servers in third-party telecommunications racks, consult the white paper, “Deploying Compaq ProLiant DL320 and ProLiant DL360 Servers into Telecommunication (Telco) Racks,” Compaq document number 13NS-1000A-WWEN available on the Compaq website at

www.compaq.com



Figure 1: Compaq ProLiant DL320 ultra-dense server



Figure 2: Compaq ProLiant DL360 ultra-dense server

Following the guidelines in this document will minimize planning and installation time; however, do not use this document as your sole source of information for the rack installation. Other rack installation references include:

- Compaq Third-Party Rack Option Kit installation guide (poster included with each kit)
- The “Compaq Ultra-Dense Server Deployment Solutions Overview” white paper available at www.compaq.com
- Compaq Rack Builder Pro design and planning software utility, available for download from the Compaq website at www.compaq.com/racks
- Product-specific user guides and manuals

Rack Warnings

This document should be used only as an information source for planning your deployment. Avoid personal injury and equipment damage by following accepted safety practices.

WARNING: Ensure proper floor support. Deployment of ultra-dense servers, related equipment, and cables exceeds 1,800 pounds for a ProLiant DL360 single 42U rack and 1,700 pounds for a ProLiant DL320 single 42U rack.

WARNING: Be aware of the center of gravity and tipping hazards. Compaq recommends that the rack footings extend 10 inches from the front and back of any Compaq rack 22U or higher. Adequate stabilization measures are required. Ensure that the entire rack assembly is properly secured and that all personnel are trained in proper maintenance and operation procedures. Tipping hazards include personal injury and death.

CAUTION: Ensure your installation has adequate power supply and branch circuit protection.

CAUTION: Thermal dissipation requirements of an ultra-dense server deployment mandate minimum unrestricted airspace of three inches in both the front and the rear of each ProLiant DL320 and ProLiant DL360 server.

Compaq Third-Party Rack Option Kit

The Compaq Third-Party Rack Option Kit for ProLiant DL320 and ProLiant DL360 servers provides a complete mounting solution that adapts to a variety of third-party racks.

The Compaq Third-Party Rack Option Kit includes a set of adjustable rack rails that attach to third-party rack posts using customer-supplied fasteners appropriate for the rack. Compaq supplies adapter washers for M5 and 10-32 thread mounting screws.

The depth-adjustable rack rails mate to the rails preinstalled on the ProLiant DL320 and ProLiant DL360 servers for slide-in installation.

The Compaq Third-Party Rack Option Kit includes a cable management tray option. A minimum rack depth of 28 inches is required to use the cable management tray.

The Compaq Third-Party Rack Option Kit comes with a detailed installation guide. Consult this installation guide for details on adapting to your particular third-party rack.

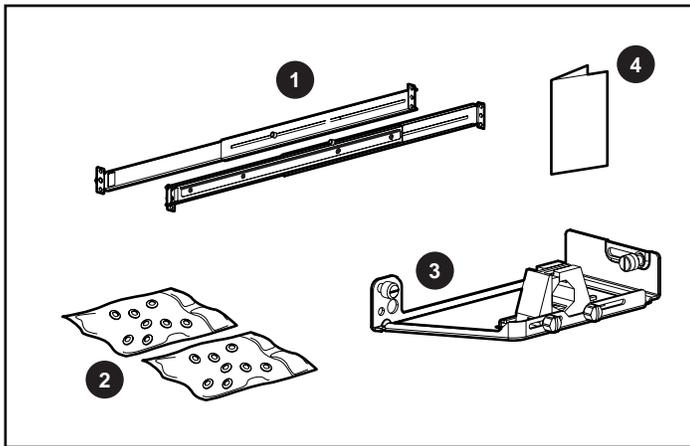


Figure 3: The ProLiant DL320 and ProLiant DL360 server Third-Party Rack Option Kit

Table 1. Third-Party Rack Option Kit

Item	Description
①	Rack Rails
②	Adapter Washer
③	Cable Management Tray
④	Installation Guide

The ProLiant DL320 server includes a cable support bracket for use when installing the ProLiant DL320 with a Compaq Third-Party Rack Option Kit.

Note: The Compaq Third-Party Rack Option Kit is for fixed rail installation. Although the ProLiant DL320 and ProLiant DL360 servers slide in for installation, remove the server from the rack for service.

Server Specifications for Deployment

For third-party rack design, ProLiant DL320 and ProLiant DL360 server specifications include:

- Weight
- Minimum and maximum dimensions for kit installation
- Power consumption
- Thermal dissipation

Weight

A fully configured ProLiant DL320 server weighs 25 pounds and includes:

- Two Wide Ultra3 hard disk drives
- A Remote Insight Lights-Out Edition option
- Standard server rails attached to the server chassis

A fully configured ProLiant DL360 server weighs 29 pounds and includes:

- Two Wide Ultra3 hard disk drives
- A Remote Insight Lights-Out Edition option
- Standard server rails attached to the server chassis

Table 2 lists the weights of individual components used in deployments of ProLiant DL320 and ProLiant DL360 servers in third-party racks.

Table 2. Component weights for calculation

Item	Weight (ProLiant DL320)	Weight (ProLiant DL360)
Configured (1 server)	25.00 lb	29.00 lb
Fully configured (42 servers)	1,030 lb (approx)	1,200 lb (approx)
Wide Ultra3 hard disk drive	1.90 lb	1.90 lb
Remote Insight Lights-Out Edition option	0.50 lb	0.50 lb
Third-Party Rack Option Kit rack rails (set)	2.50 lb	2.50 lb
Third-Party Rack Option Kit cable management tray	1.00 lb	1.00 lb
KVM cable bundle	1.42 lb	1.42 lb
High voltage Y power cable	1.00 lb	1.00 lb
Server console switch	5.25 lb	5.25 lb

WARNING: External cable weight contributes to the overall weight of the rack installation. Because cable installation and load-bearing designs vary greatly, carefully consider cable weight in all designs.

WARNING: Do not exceed the specified weight limit for the third-party rack or the floor. When creating deployments of ProLiant DL320 or ProLiant DL360 ultra-dense servers in a third-party rack, include in the weight calculations the weight of the rack rails, cable management trays and cables that place a load on the rack.

CAUTION: The cable management tray design reduces cable congestion and relieves strain on connectors. Ensure that the cabling design provides both adequate airspace for thermal dissipation and strain relief for the cable connections on the ProLiant DL360 or ProLiant DL320 server if the cable management tray is not used.

If the ProLiant DL360 and ProLiant DL360 servers do not include Wide Ultra3 hard disk drives ❶, or a Remote Insight Lights-Out Edition option ❷, subtract those component weights from the weight totals.

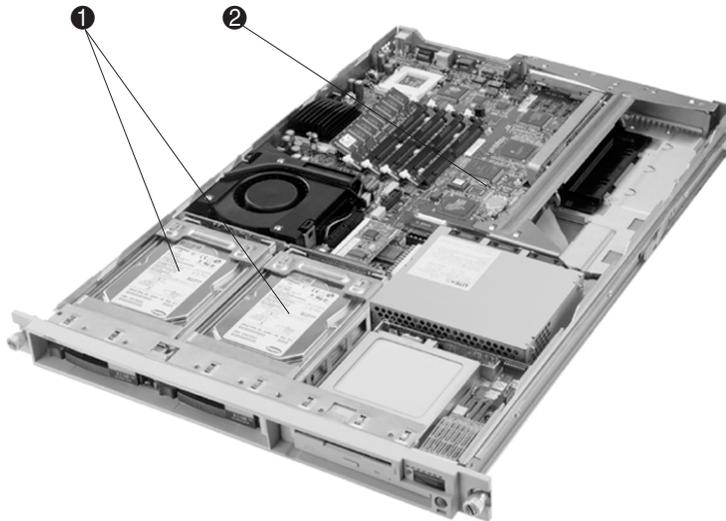


Figure 4: Hard drive and Remote Insight locations (DL360 shown)

Floor Loading

All buildings and raised computer room floors are engineered to provide a specific floor loading capacity. The floor area must be designed to provide proper support for a fully populated rack.

WARNING: When configuring a system, ensure that the floor loading specifications are adhered to. Failure to do so may result in physical injury or damage to the equipment and the facility.

Dimensions

Compaq designed the Compaq Third-Party Rack Option Kit to comply with EIA 310-D specifications for rack width.

Table 3 lists the dimensions for installing ProLiant DL320 and ProLiant DL360 servers using the Compaq Third-Party Rack Option Kit.

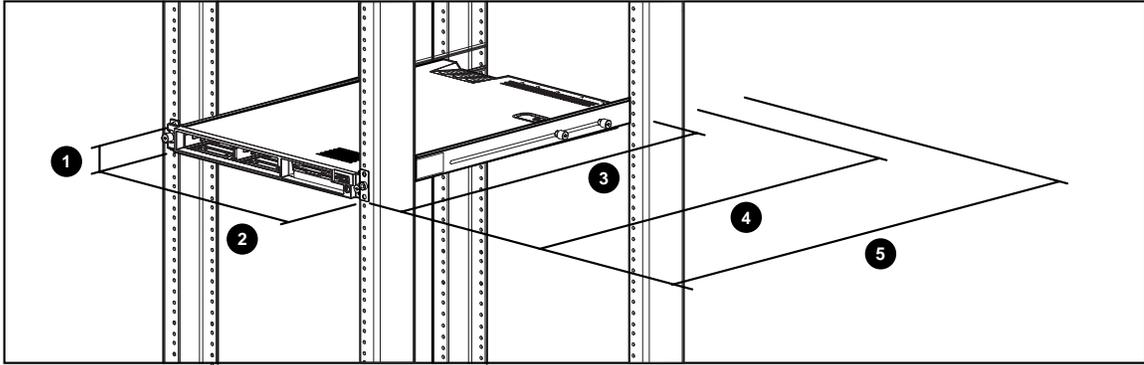


Figure 5: Dimension requirements for the Compaq Third-Party Rack Option Kit

Table 3. Space requirements

	ProLiant DL320	ProLiant DL360
① Height	1.75 in (1U)	1.75 in (1U)
② Width (with no rails) Width (with rails)	16.75 in 17.72 in	16.75 in 17.72 in
③ Minimum depth	22 in	25 in
④ Minimum depth with cable management tray	28 in	28 in
⑤ Maximum depth adjustment	33 in	33 in
⑥ Maximum depth with cable management tray	33 in	33 in

Note: When creating deployments of ultra-dense servers in third-party racks, include the minimum clearances for installation of the server, rack rails and cables.

IMPORTANT: Compaq products are designed to provide airflow from the front of the rack to the rear. It is recommended that rack components only be installed on the front rails for many reasons, including proper airflow.

Power Consumption

Power consumption requirements for ProLiant DL320 and ProLiant DL360 servers are listed in Table 4.

Table 4. Power consumption

	ProLiant DL320	ProLiant DL360
Maximum DC output	180W	190W
Maximum AC input	200W	292W
Consumption using 110V AC, fully loaded	2.00A	2.66A
Consumption using 208V AC, fully loaded	1.00A	1.41A

Note: A simple formula to calculate server power requirements for installation is:
(number of ProLiant servers) * (maximum AC input) = maximum power requirements for servers
Example with 42 ProLiant DL320s: 42 * 200W = 8,400W

WARNING: To reduce the risk of personal injury, fire, or damage to the equipment, do not overload the AC supply branch circuit that provides power to the rack. Consult the electrical authority having jurisdiction over the facility wiring and installation requirements.

CAUTION: If the rack is equipped with an integrated power distribution scheme, make sure that the power distribution circuits are not overloaded.

Thermal Dissipation

The ProLiant DL320 and ProLiant DL360 servers have an internal design that achieves efficient cooling through unrestricted airflow. A large cooling fan and three smaller power supply fans move cool air from the front of the unit, over the heated components, and out the chassis through large, angled air vents at the rear of the unit.

Slots and openings in the product (see Figure 6 and Figure 7) are provided for ventilation and should never be blocked or covered, since they ensure reliable operation of the product and protect it from overheating. The product should not be placed in a built-up enclosure unless the enclosure has been specifically designed to accommodate the product, proper ventilation is provided for the product, and the manufacturer's instructions have been followed.

The open "U" spaces in the front of a rack should have blanking panels installed to support the front-to-back air flow design needs. As a good practice, 24-inches (61 cm) of space should be allowed between the rack and other fixtures to ensure correct front-to-back airflow and allow service access.

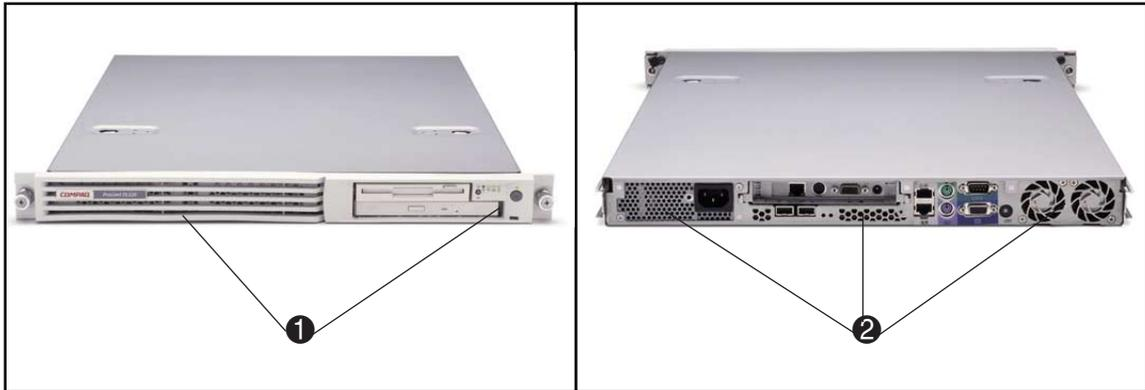


Figure 6: Intake ❶ and Exhaust ❷ vents for the ProLiant DL320 server

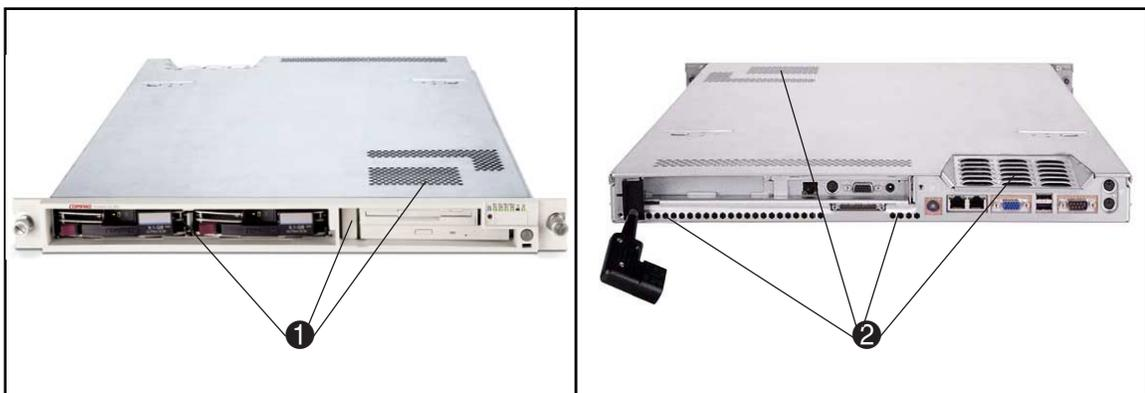


Figure 7: Intake ❶ and Exhaust ❷ vents for the ProLiant DL360 server

When installed in a 1U ultra-dense server deployment, airflow is sufficient to cool ProLiant DL320 and ProLiant DL360 servers if the following criteria are met:

- Ambient air temperature at the front of the unit does not exceed 35°C (95°F).
- Relative humidity does not exceed 90 percent while operating.
- Unrestricted airspace of at least three inches exists in front of the server.
- Unrestricted airspace of at least three inches exists at the rear of the server.

Note: Cabling must not restrict airflow. The Compaq Third-Party Rack Option Kit includes a cable management tray to provide appropriate clearance for airflow. Ensure airflow exiting the server's exhaust vents is unrestricted if not using the cable management tray.

Third-Party Rack Doors and Panels

Most third-party rack enclosures are designed to be used in raised-floor computer rooms, with cool air being forced in from the bottom of the rack and exhausted through the roof. Therefore, the front and rear doors of most third-party racks are solid and permit no airflow.

ProLiant DL320 and ProLiant DL360 servers should not be placed in a built-up enclosure unless the enclosure has been specifically designed to accommodate the product, proper ventilation is provided for the product, and the manufacturer's instructions have been followed. Compaq products are designed to provide airflow from the front of the rack to the rear. Installation of a Compaq component in a third-party rack with solid doors may lead to overheating and consequent failure of those components.

Installation Procedures for Third-Party Racks

The following procedures are used to create deployments of ProLiant DL320 and ProLiant DL360 ultra-dense servers in third-party racks.

Installing the Compaq Third-Party Rack Option Kit Rack Rails

ProLiant DL360 servers ship with standard rails attached. These rails will mate to the rack rails found in the Compaq Third-Party Rack Option Kit.

Install all rack rails to the third-party rack before installing any servers. Compaq provides adapter washers for M5 and 10-32 thread mounting screws. Refer to the *Compaq Third-Party Rack Option Kit Installation Guide* for rack rail installation instructions.

Adjusting Depth

The rack rails allow for depth adjustment from 22 to 33 inches. The adjustment is a tool-free design, using thumbscrews. Turn the thumbscrews counterclockwise to adjust the depth, then turn the thumbscrews clockwise to secure the rack rail adjustment.

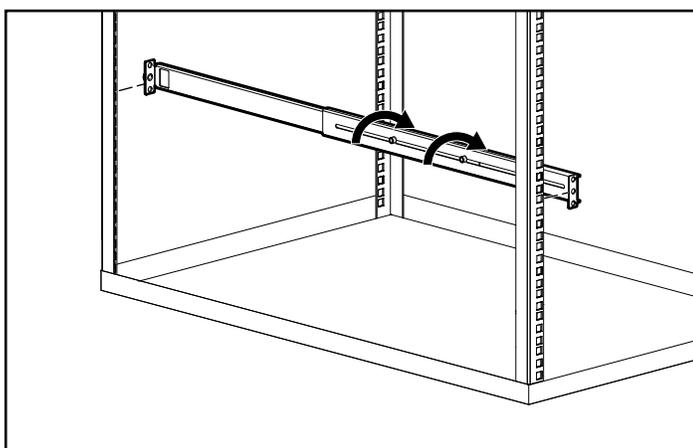


Figure 8: Compaq Third-Party Rack Option Kit rack rail depth adjustment

Preparing the Server

Install all internal options such as PCI boards, memory or processors before mounting the server into the rack. Refer to the Setup and Installation Guide that ships with the server for information on installing options.

Installing ProLiant servers in the Rack

1. Start by installing servers at the bottom of the rack and working upwards.
2. Slide the server ❶ into the rack rails.
3. Attach the server to the rack rails using the thumbscrews ❷ on the server faceplate.

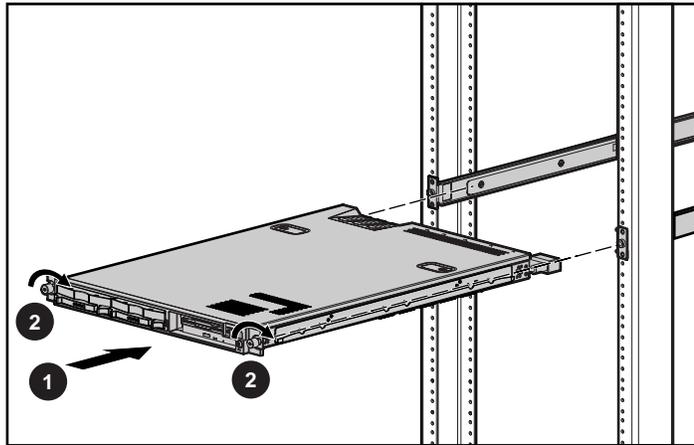


Figure 9: ProLiant DL360 server third-party rack installation

Console Management for Ultra-Dense 1U Servers

The console management scheme determines cabling design and management.

Two ways to design a full rack deployment of ultra-dense 1U ProLiant DL320 or ProLiant DL360 servers include:

- Use of remote management option boards, such as the Remote Insight Lights-Out Edition board, in each server
- Use of adjacent rack space to house remote console switches, monitors, and keyboards

Remote Insight Lights-Out Edition

Remote management boards simplify server monitoring, control and wiring. Typical wiring for a ProLiant DL320 or ProLiant DL360 server with a Remote Insight Lights-Out Edition installed is reduced to the server power cord, the Remote Insight Lights-Out Edition CAT5 network connection, and the two CAT5 cables to the redundant server network interface cards (NICs).

ProLiant DL320 and ProLiant DL360 servers use an internal cable to supply power to the Remote Insight Lights-Out Edition and eliminate loop-back cabling for the keyboard, mouse, and video.

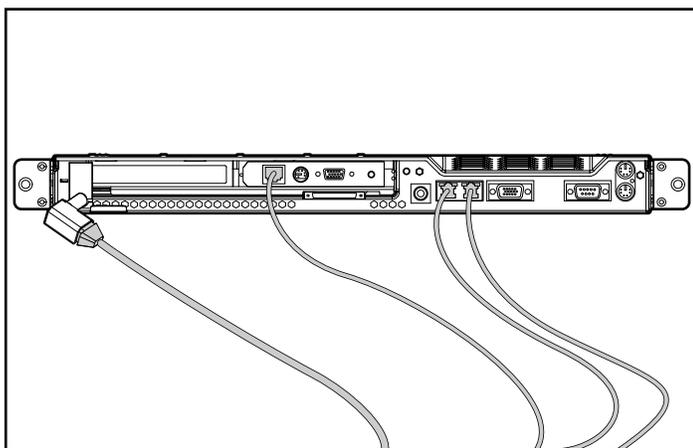


Figure 10: Typical cabling using the Remote Insight Lights-Out Edition (DL360 shown)

The Remote Insight Lights-Out Edition allows full graphical control of the server, even when the server operating system is down or the server is powered off. The Remote Insight Lights-Out Edition can cycle the power on the server, and allow a reboot from a “virtual floppy” imaged anywhere on the network. The Remote Insight Lights-Out Edition is accessed through a Web browser, and no additional software is required on the server or the system providing access.

For additional information on remote management options, consult the Compaq website at <http://www.compaq.com/manage/>

Console Switches, Monitors and Keyboards

The ProLiant DL320 and ProLiant DL360 servers can be cabled to a Compaq 1U console switch. Each of these low profile console switches provides connectivity for up to eight servers. The console switches can be cascaded one level to provide connectivity for up to 64 servers. Using a 2U Compaq TFT display and Compaq keyboard options, customers can deploy ProLiant DL320 and ProLiant DL360 ultra-dense servers in minimal rack space configurations.

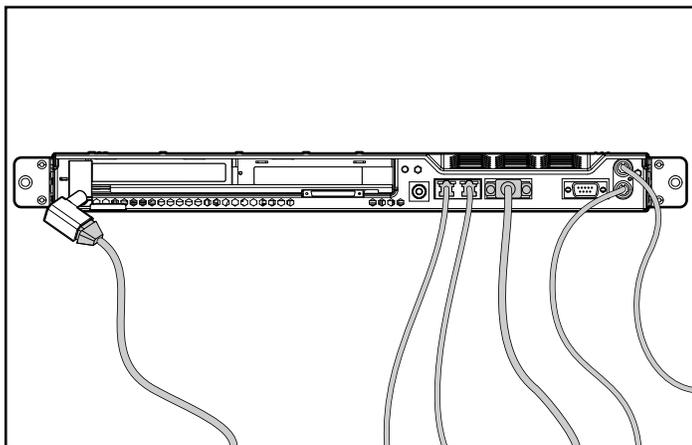


Figure 11: Typical cabling using server console switches (DL360 shown)

Cabling

Cabling will vary based on the I/O options. The ProLiant DL320 ships with a standard 10 foot IEC-IEC power cable for rack mount deployment using either a Power Distribution Unit (PDU) or Uninterruptible Power Systems (UPS). The ProLiant DL360 server ships with a standard 12 foot country-specific power cable. For specific cabling solutions developed by Compaq, refer to the white papers, “Compaq ProLiant DL320 Ultra-Dense Server Deployment in Compaq Racks” and “Compaq ProLiant DL360 Ultra-Dense Server Deployment in Compaq Racks” available on the Compaq website:

www.compaq.com

CAUTION: Any cabling solution must ensure sufficient airspace for thermal dissipation, and provide strain relief for cable connectors.

Note: For high-voltage installations, Compaq offers a High Volume Deployment Option Kit containing 11 Y-shaped high voltage power cables for powering two servers with one wire. This design provides clean power cable management.

Figure 12 shows a typical in-rack local-console rack configuration for a 42U rack. A single 1U Internal Keyboard with Trackball and one 2U TFT5000R 15-inch Flat Panel Monitor support 35 ProLiant DL360 servers through five cascaded Server Console (KVM) switches.

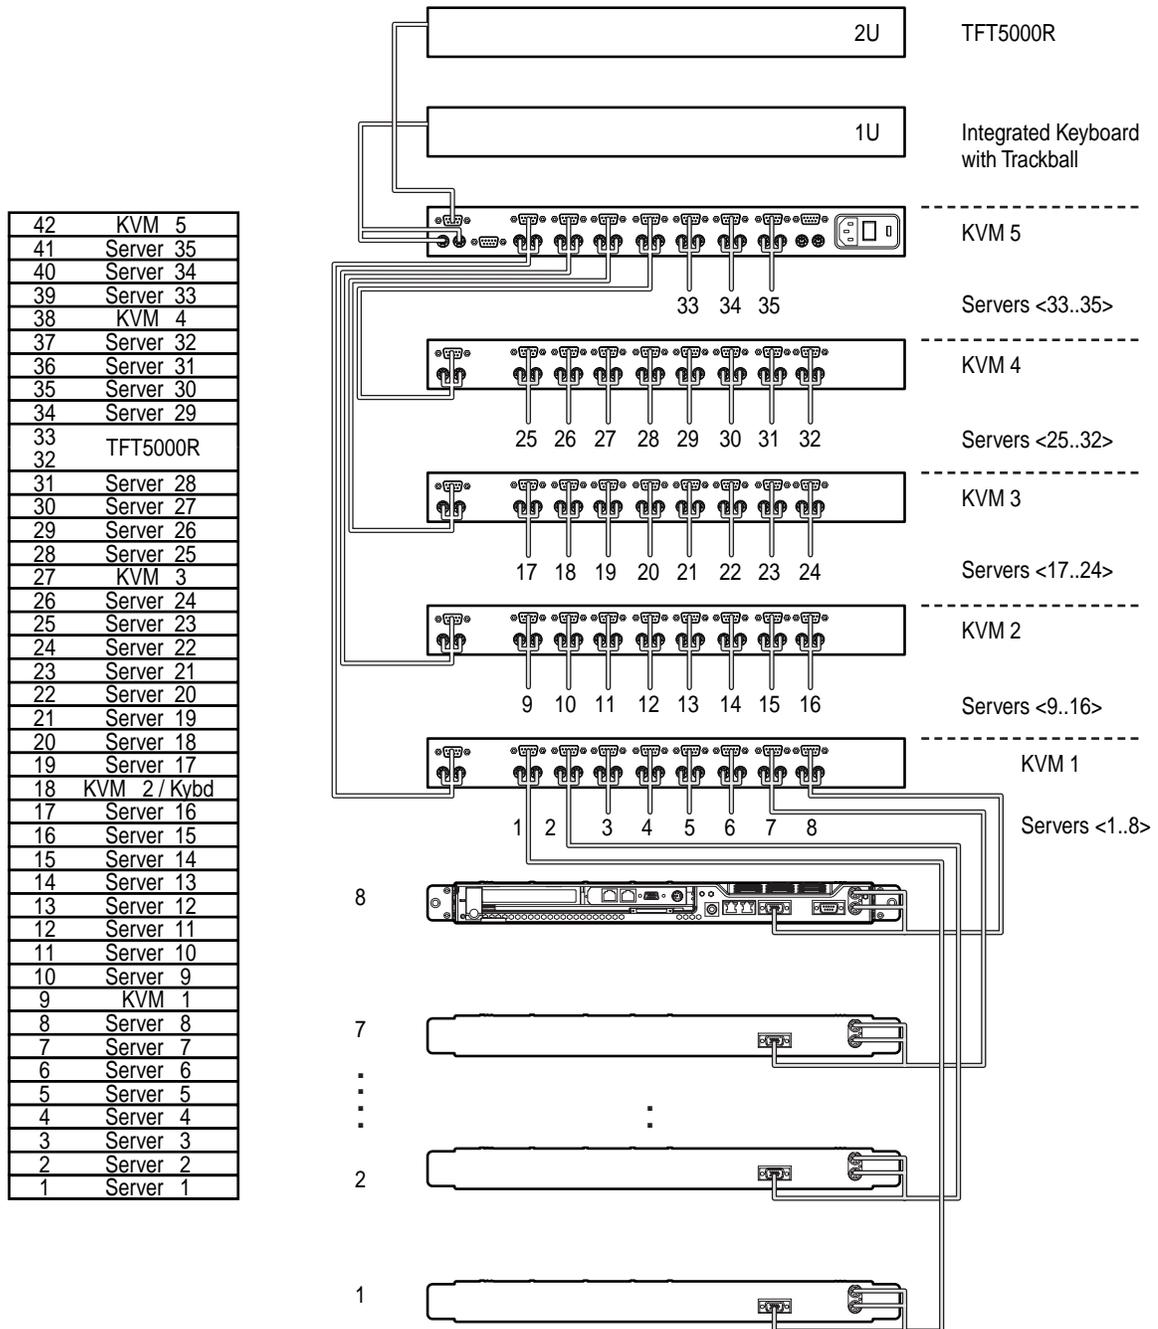


Figure 12: Typical KVM and cascading console switch solution for 35 ProLiant Servers

Cable Management Tray

The cable management tray provides:

- Strain relief for cables and connectors
- Space for airflow required for cooling

Once the server is installed into the rack, attach the cable support bracket, then the cable management tray. The cable management tray for the ProLiant DL320 features notches **1** for alignment and toolfree thumbscrews **2**.

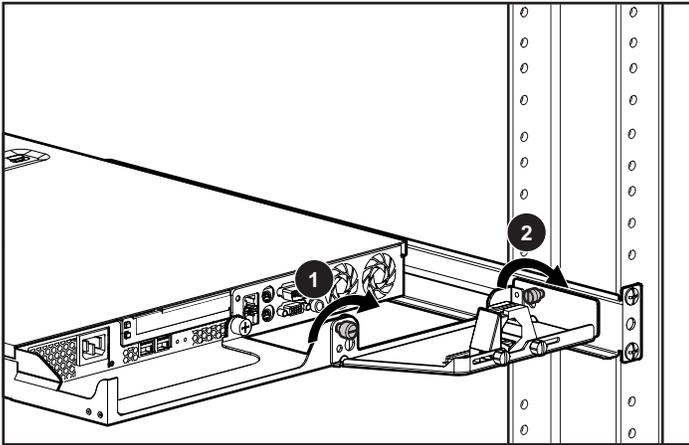


Figure 13: Compaq Third-Party Rack Option Kit Cable Management Tray (ProLiant DL320)

The cable tray for the ProLiant DL360 features tool-free thumbscrews **1** for quick installation.

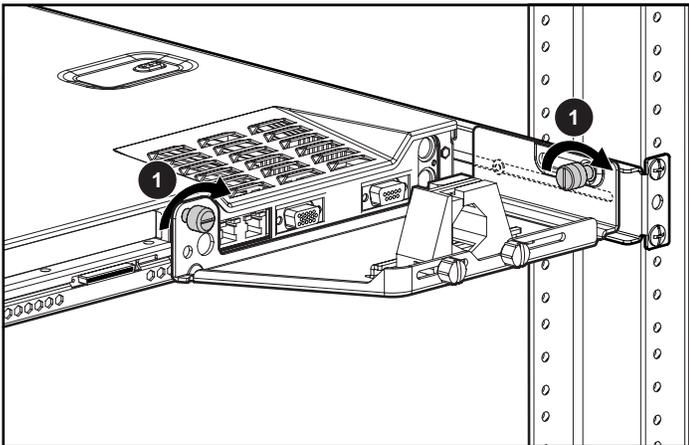


Figure 14: Compaq Third-Party Rack Option Kit Cable Management Tray (ProLiant DL360)

Any installation that does not use the tray must include proper measures to relieve strain on connectors and provide the appropriate amount of unrestricted airspace required by the ProLiant DL320 and ProLiant DL360 server for thermal dissipation.

Appendix A

Unit Identification

In an ultra-dense server deployment, properly identifying a server requiring service can be difficult. The ProLiant DL320 and ProLiant DL360 servers include special LEDs that identify servers requiring service.

The Compaq ProLiant DL320 and ProLiant DL360 server Unit Identification (UID) features on both the front and rear of the server simplify server identification in deployments of ultra-dense servers. The faceplate LED and switch are easy to locate. The rear UID is an integrated LED and switch.

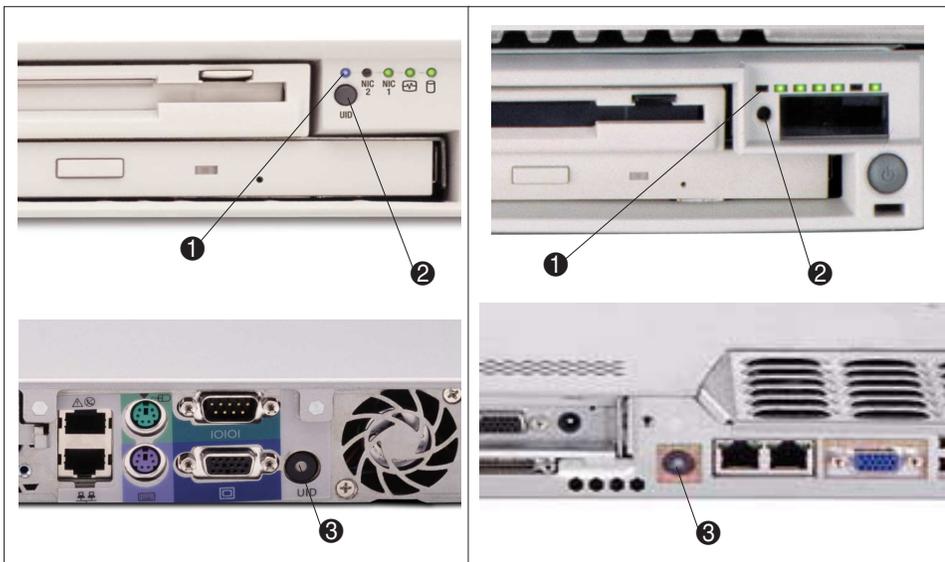


Figure 15: Unit Identification (UID) LEDs and switches (DL320 on left and DL360 on right)

When the UID switch ② is on, the blue LEDs illuminate on the front ① and back ③ of the server, marking it as targeted for service. This front-and-rear feature reduces the risk of disconnecting cables from the wrong server. Front and rear NIC link and NIC activity LEDs also help to identify servers requiring service.

Appendix B

Compaq Rack Builder Pro

Compaq Rack Builder Pro is a Windows-based installation and configuration tool that simplifies the process of generating and maintaining rack environments by helping customers plan and configure Compaq racks with rack-mountable products.

Rack Builder Pro has two modes of operation:

- Assisted Mode is for first time users or users who would like help in properly sizing their rack-mount components. Assisted Mode includes a simple interview session to help select the appropriate racks and rack-mount components. Functional and regulatory requirements are applied to automatically perform the calculations necessary to properly size power management products.
- Builder Mode is for more experienced users who are familiar with the Compaq product line. Builder Mode does not perform any of the calculations necessary for selecting and or sizing rack-mount components.

Configuration rules are sometimes used to help identify problematic configurations. They communicate good engineering practices and identify problems and limitations found during product qualification testing. These rules do not guarantee that the final system configuration will be safe and compliant, and do not absolve the final system integrator from responsibility for shipping safe and compliant products.

Key Features

Compaq Rack Builder Pro includes:

- Support for Compaq 9000, 7000, and 4000 Series racks and accessories
- Support for 2-5-2 and 6-3 part numbers
- Packet upgrades download updates, not the entire application
- Discontinued products that are listed as EOL (End of Life)
- Input power requirements and Earth Leakage Current computations
- Generation of reports

New features specific to the Assisted Mode include:

- Ability to select the number of power supplies for each component
- Ability to apply Earth Leakage Current, as well as functional and regulatory requirements, to configure Power Management Products (UPS and PDU)
- Ability to configure Server Console Switches and cables
- Ability to configure rack options and accessories, including stabilizing feet, baying/coupling kits, keyboards, tower to rack conversion kits, and so on

Rack Builder Pro can be reached through the main rack product website at

<http://www.compaq.com/racks>

Appendix C

Monitors, Keyboards, and Console Switches

Additional information about Compaq Storage Division products is available on the Compaq website at

<http://www.compaq.com/racks>

15-inch Flat Panel Monitor (TFT5000R)

The Compaq TFT5000R (15") Flat Panel Monitor provides powerful performance in a space—saving 2U-form factor for rack cabinet usage (allowing the monitor to be neatly tucked away when not in use).

1U Drawer and Internal Keyboard with Trackball

Designed to work together to save room in space-constrained rack-mount environments, the Compaq 1U Keyboard Drawer and Internal Keyboard with Trackball give corporate IT managers extraordinary convenience, reliable performance, and improved manageability.

The 1U Keyboard Drawer requires half the depth of other keyboard drawers and provides mounting options for Compaq Server Console Switches.

Console Switches

Compaq Server Console Switches are key components for rack mount implementations. The family of Compaq Server Console Switches allows multiple servers in a rack to be accessed and managed by one keyboard, mouse, and monitor. The Compaq Server Console Switch family consists of five models, a 2-port, 4-port, and three 8-port models. The two 8-port models provide dual-user functionality, allowing system control by more than one user.

Part Numbers

Table 5 lists the part numbers for local console components.

Table 5. Local Console Components

Description	P/N	Notes
Server Console Switch 1x8-port (1000-230VAC)	400337-B21	
	400337-291	Japan
	400337-B31	International
TFT5000R Flat Panel Monitor	120207-001	
	120207-291	Japan
	120207-B31	International
Rack Internal Trackball Keyboard - Opal	185152-186	
	185152-406	
Keyboard Tray	338-056-B21	
CPU-to-Switchbox Cable	110936-B24	3 ft cables
	110936-B25	6 ft cables

Appendix D

Contact Us

For comprehensive online support, refer to:

<http://www.compaq.com/>

For international information, refer to:

http://www.compaq.com/corporate/overview/world_offices.html

For a list of Compaq products, refer to:

<http://www.compaq.com/showroom/>

For a list of Compaq rack options and accessories, refer to:

http://www.compaq.com/products/storageworks/rack_accessories/rack-accessories.html

For Compaq CustomSystems & Solutions, refer to:

<http://www.compaq.com/solutions/customsystems/>

Table 6. Departments and Telephone Numbers for the United States and Canada

Department	Telephone Numbers
Consumer Direct	1-800-888-0220
Compaq DirectPlus	1-800-888-5858 (U.S.)
Compaq Partner Direct	1-800-888-5874
Compaq Reseller Locator	1-800-345-1518 (Option 3)
Compaq Canada Reseller Locator and Product Literature	1-800-567-1616
Diskette Fulfillment (backup diskettes for preinstalled software)	1-800-952-7689 (U.S.) 1-800-349-8498 (Canada)
Compaq Product Information	1-800-345-1518 (U.S.) 1-800-567-1616 (Canada)
Compaq Technical Support	1-800-OK-COMPAQ (U.S. and Canada) 1-800-652-6672